



# HT-1560EM Series

# Damping Tester

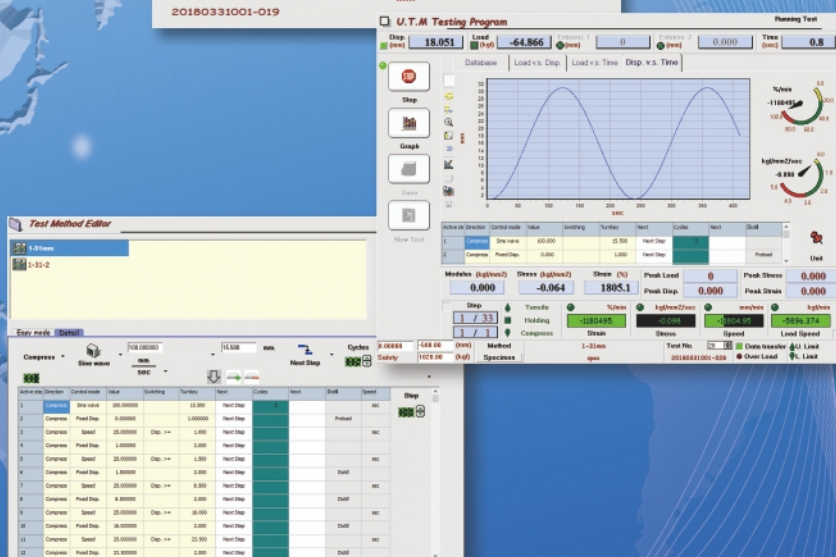

This machine uses Electric- servo cylinder to actuation, suitable for pre-force for shock absorbers, damping testing, and quality inspections and R & D for shock absorbers.

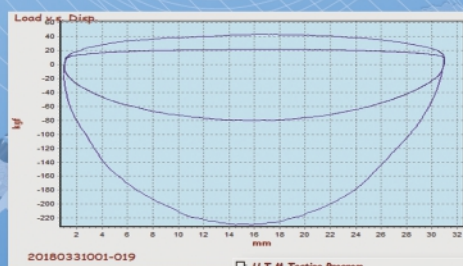

HT-1560		EM5V6	EM5V10	EM10V6	EM10V10
Max force (kN)		± 5	± 5	± 10	± 10
Force transducer (kN)		± 10	± 10	± 20	± 20
Accuracy		± 1%			
Encoder (mm)		Max : 100, Resolution : 0.002			
Max line speed rate V (m/s)		0.6	1.0	0.6	1.0
Stroke of electric cylinder (mm)		± 50	± 50	± 50	± 50
Grips		Mechanical / Hydraulic ( Option )			Hydraulic
Operation testing space ( W x H mm )		380 x 600			
Crosshead upward / downward system		Driver by electron-system, quick adjustment.			
Crosshead fasten system		Manual			
Actuator	Servo motor	Servo motor & servo driver control apparatus			
	Power consumption	1.0 kVA	2.0 kVA	2.0 kVA	3.0 kVA
Control and data collection system	Computer	PC one set			
	Controller	HUNG TA interface card			
	Software	Hung Ta software, one set			
Dimension ( WxDxH )	Main machine (mm)	752 x 750 x 2000			
	Weight (kg) about	320 kg	330 kg	330 kg	330 kg
Safety protection		Overload protection, Leakage protection, Emergency switch, Limiter protection			
Standard accessory		Tool Kit, Operation manual, Calibration report, one set of each above			
Power		3ø / 220V / 60 Hz or 3ø / 380-415V / 50 Hz			

Specification if change, not inform individually.



**Hung Ta**  
Instrument Co., Ltd.  
advanced material and component testing instrumentation

## Headquarters & Factory

No. 20, Jingke Central Rd. Nantun Dist., 40852 Taichung City, Taiwan  
 TEL : +886-4-23590108  
 FAX : +886-4-23593110, 23588599  
 Int'l hotline : + 886-933-208585  
 E-mail : info@hungta.com

Website :  
[www.hungta.com](http://www.hungta.com)  
[www.hungta.com.tw](http://www.hungta.com.tw)  
[www.hungta.com.cn](http://www.hungta.com.cn)